



SPECIFICATIONS

Model No.		KAGE-PS-24100
Dimensions	Length	522mm
	Width	239mm
	Height	218mm
Weight		About 22kg

CHARACTERISTICS


Nominal Voltage	25.6V
Nominal Capacity	100Ah
Nominal Energy	2560Wh
Internal Impedance	≤ 20mΩ
C charge Voltage	29.2V
Discharge Cut-off Voltage	20V
Standard Charge Current	20A
Max. Charge Current	100A
Standard Discharge Current	20A
Max. Discharge Current	100A
Peak Discharge Current	200A < 5S
Operating Temperature	Charge 0°C ~ +45°C
	Discharge -20°C ~ +55°C

Note: Max. 4 parallel connection



KAGE-PS-24100

DRAWINGS



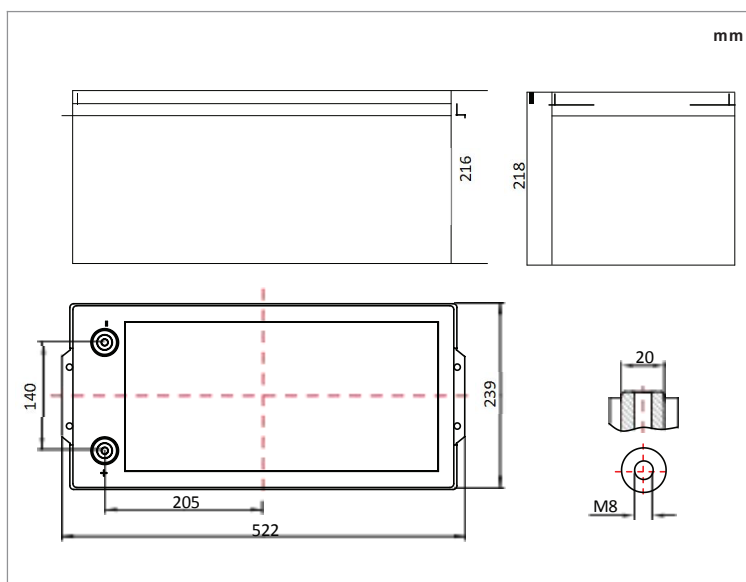


Electrical performance of product

Curve of cycle life

Curve of different discharge rate

Curve of different charge rate

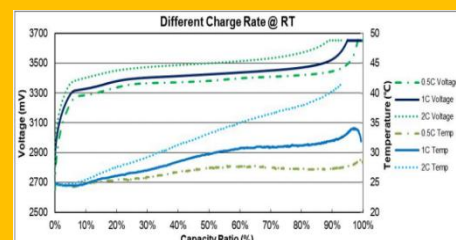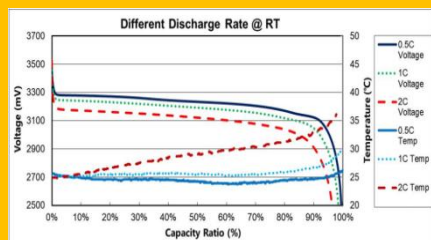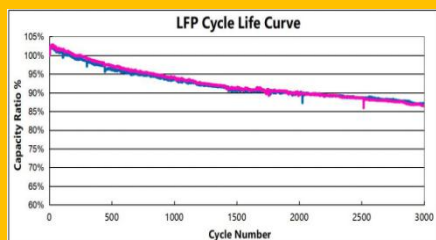

CERTIFICATIONS

UN38.3

GuangZhou KaiJie Power Supply Industrial Co.,Ltd

Add: RuiXiang Road, XinHua Industrial Zone, Huadu, Guangzhou, China

Office: 907, 908, 909 of Building 2 NO. 179 Yingbin Road, huadu, Guangzhou, Guangdong, China